Bruhath Bangalore Mahanagara Palike Dasarahalli Zone

Name of Work: Construction of RCC Drain At 1st Cross in Ravindra nagar in Ward No.13 Shettyhalli Sub Division.

Est .Cost Rs.17.00 Lakhs

Sl No	Description of Items	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300-3. Earthwork excavation by manual means in ordinary soil invoiving in average horizontal throw up to 2m & an average lift upto 1.5m , excavated surface leveled & sides neatly dressed , the disposed earth to be levelled neatly after breaking of clods complete as per specification MORTH/ Chapter 3. Page No. 142/ Item No 19.1/ PWD SR 2016-17								
	Ravindra nagar 1st cross from 2nd main to 7th cross	Cum	2	88.00	0.90	0.90	142.56		
	4th cross from 1st cross to 4th cross		2	58.00	0.90	0.90	93.96		
							236.52	175.96	41618.06
2	Removing B S Slab Drain And Stacking Page No25 Item No 5.32 PWD SR 2016-17								
		Sqm	2	88.00	1.35		237.60		
			2	58.00	1.35		156.60		
							394.20	65.72	25906.82
3	KSRB 4-1.3 : Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180kgs. with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2 Page No.12/ Item No. 4.3/ PWD SR 2016-17								
		Cum	2	88.00	0.90	0.15	23.76		
			2	58.00	0.90	0.15	15.66		
							39.42		
	From Using Available coarse aggregates								
a	Available CA			29.57			34.78	4443.52	154556.08
b	Remaining Balance Qty						4.64	5159.02	23925.71
4	KSRB 4-1.5 : Providing and laying in position plain cement concrete of mix M20 with OPC cement @ 300kgs. with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregtes @ 0.43cum, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, plinth and cills, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Page No.12/ Item No. 4.5/ PWD SR 2016-17								
	Drain Rafi Concrete	Cum	2	88.00	0.90	0.15	23.76		
			2	58.00	0.90	0.15	15.66		
			4	88.00	0.15	0.75	39.60		
	Side Wall		4	58.00	0.15	0.75	26.10		
							105.12	5874.52	617529.54

Scanned by CamScanner

5	KSRB 4-6.4 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walls at any thickness, including attached1 pilasters, buttresses, plinth cills and string courses cost of all materials, labour complete as per specifications. Specification No. KBS 4.6.2 Page No.15/ Item No. 4.31/ PWD SR 2016-17								
		Sqm	8	88.00	0.90		633.60		
			8	58.00	0.90		417.60		
							1051.20	**310.58**	**326481.70**
6	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications Specification No. KBS 4.6.3. TMT bars Fe 500. Page No. 17/ Item No. 4.46.2/ PWD SR 2016-17								
	For RCC Drian	Tonnes		**105.12**	x	60kg	6.31		
						Say	**6.31**	**64243.42**	**405196.10**
7	Providing & laying reinforeced cement precast slabs of mix CC 1:11/2:3 using 20mm & down size graded Granite metal using HYSD 10mm dia steel @ 100mm c/c both ways & Complete as per specfications.								
	Damaged Slab	**Sqm**	25	0.60		0.90	13.50		
							13.50	1680.00	22680.00
							Sub Total		1617894.02
8	**Add 5% Tender premium**								80894.70
9	**Rounding off**								1211.28
							Grand Total		1700000.00
	(Rupees Seventeen LakhsOnly)								

CERTIFICATE

1 The Work spot has been inspected and the work found to be necessary
2 The Estimate is prepared as per the PWD SR 2016-17
3 The Provision made in estimate are adequate and essential
4 This area comes under BBMP limits.
5 This work is not included in any other estimate.

Asst Engineer
Ward No-13

Asst Executive Engineer
Shettyhalli Sub-Division
BBMP

Executive Engineer
Dasarahalli Zone
BBMP

ನಂ. EE/DD/AS/540/17-18 ದಿನಾಂಕ : 24.11.17
ರೂ. (Rs. 17.00 Lakh) Rs. Seven teen Lakh only
ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ. EE/DD/TS/380/17-18 ದಿನಾಂಕ : 25.11.17
ರೂ. (Rs. 17.00 Lakh) Rs. Seven -teen Lakh only
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿ ನೀಡಿದೆ
ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

Scanned by CamScanner

Name of Work

Construction of Rcc Drain at 1st cross in Ravindra Nagara in Ward No. 13 Shettyhalli Sub Division.

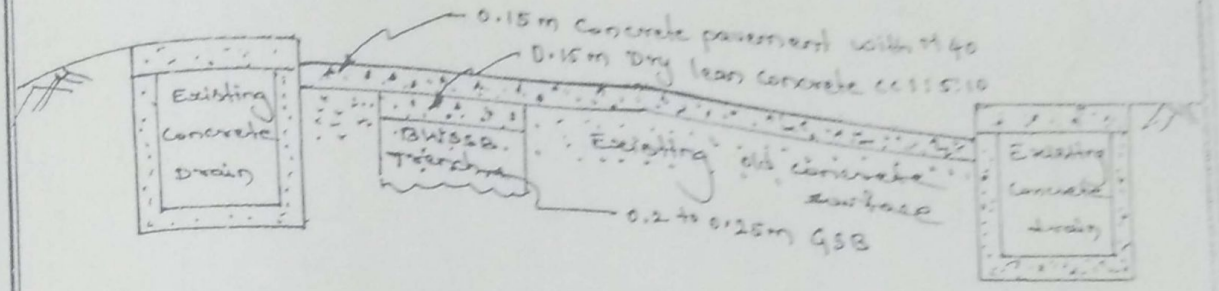
Carriage way 3 to 4.5m
0.15m Concrete pavement with M40
0.15m Dry lean concrete cc 1:5:10
Existing Concrete Drain
Bituminous Tack coat
Existing old concrete surface
0.2 to 0.25m GSB
Existing Concrete drain

Typical c/s of cc Road Surface

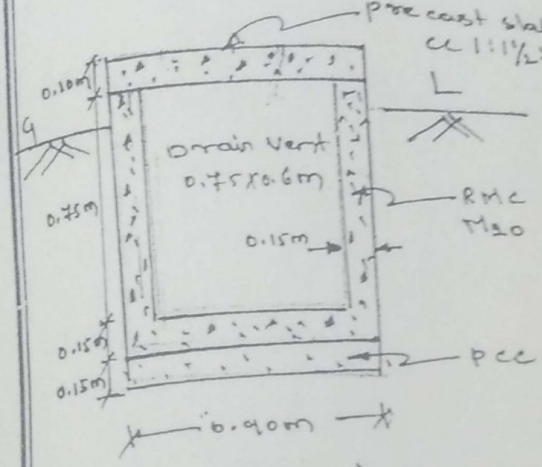

c/s of Rcc Drain

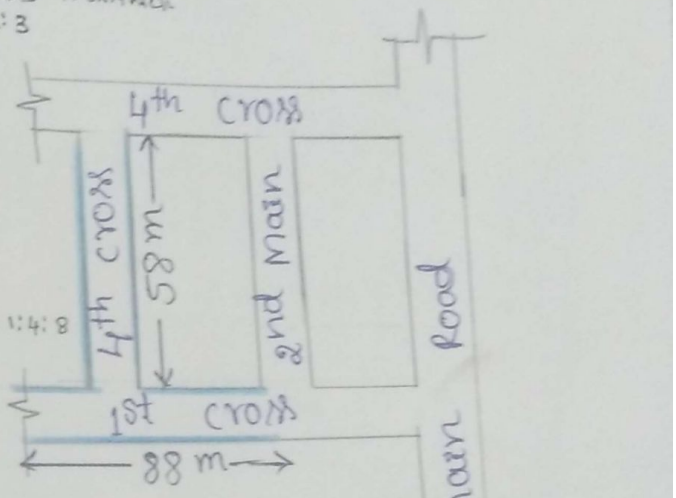

Index

Rcc Drain

Pipeline Road.

Asst. Engineer
Ward No. 13

Asst. Executive Engineer
Shettyhalli Sub Division, Dasarahalli Zone
BBMP Bangalore

EXECUTIVE ENGINEER

Scanned by CamScanner